
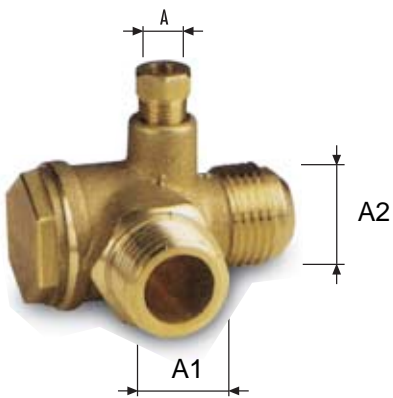


# NON-RETURN VALVES

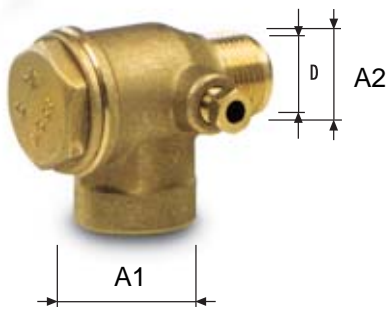

A1	A2	D	A	opening pressure		operating temperature C.
				ø mm	BAR	
1/4" m	3/8" m	10	1/8"		6	16 VITON: -10°:+250°
3/8" m	3/8" m	10	1/8"		9	16 NBR: -10°:+100° VITON: -10°:+250°
1/2" m	3/8" m	10	1/8"		9	16 NBR: -10°:+100° VITON: -10°:+250°
1/2" F	3/8" m	-	1/8"		9	16 NBR: -10°:+100° VITON: -10°:+250°
1/2" m	22x1,5 m	15	1/8"		11	16 NBR: -10°:+100° VITON: -10°:+250°
1/2" m	1/2" m	-	1/8"		11	16 NBR: -10°:+100° VITON: -10°:+250°
1/2" f	1/2" m	-	1/8"		11	16 NBR: -10°:+100° VITON: -10°:+250°
3/4" m	1/2" m	-	1/8"		11	16 NBR: -10°:+100° VITON: -10°:+250°
3/4" f	1/2" m	-	1/8"		11	16 NBR: -10°:+100° VITON: -10°:+250°
1" m	3/4" m	-	1/8"		16	16 VITON: -10°:+250°
3/4" f	3/4" m	-	1/8"		16	16 VITON: -10°:+250°
1" f	1" m	-	1/8"		20	16 VITON: -10°:+250°